

UPL-27

HOLDING CABINET. OF FROZEN FOOD IN AMERICAN RANGE

CHARACTERISTICS

- Exterior and interior in AISI-430 stainless steel.
- Galvanised sheet steel backrest.
- Inner bottom made of AISI-304 stainless steel with curved edges.
- Reversible opening door, with automatic closing system and magnetic seal (remains open beyond 90° of opening).
- Inner wire shelves with plastic-coated steel, height adjustable.
- LED interior light.
- Wheels as standard.
- Key lock as standard.
- Ventilated condensing unit.
- Forced draught system evaporator, with anti-corrosion epoxy coating.
- Forced draught fan stop when opening the door.
- Automatic evaporation of defrost water.
- Injected polyurethane insulation, density 40 kg/m³, zero ODP and GWP effects.
- Digital temperature control, optimised defrosting, high condensation temperature alarm. Efficient energy consumption management.






Length (mm)	Depth (mm)	Height (mm)	Capacity (L)	Cooling capacity (W)	Range	Class climate	Coolant
660	850	2145	645	606	-20°C -15°C	5 (40°C 40%RH)	R-290

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.

UPL-27

HOLDING CABINET. OF FROZEN FOOD IN AMERICAN RANGE

Temperature control	Digital
Evaporator	Epoxy finned block
Capacitor	Finned block
Voltage / Frequency	230V / 60Hz
Rated power	525 W
Thermal insulation	Polyurethane, density 40 kg/m ³ , zero ODP and GWP
Foaming agent	HFO
Side insulation thickness	60 mm
Outside	AISI-430 stainless steel
External backrest	Galvanised steel
Inside	AISI-430 stainless steel
Light	Led
Number of shelves	3
Shelf dimensions (W x D)	520 mm x 645 mm

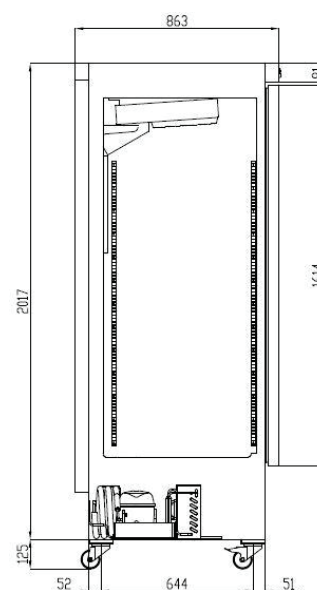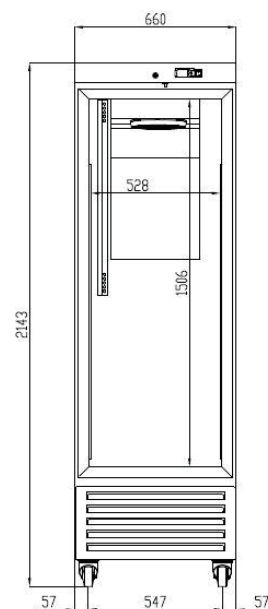

Technical and constructive characteristics subject to variation without prior notice, all photos should be considered as a reference.