

# EC 126 EASY FIT

Self Contained Ice Machine up to 74 kg

Item #:
Project:
Quantity:



## FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized control.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front ON-OFF Switch.
- Routine Maintenance visible alarm light on front panel.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.



EC L 126  
Large Gourmet 39 g  
Ø 38 x H 41 mm



EC M 126  
Medium Gourmet 20 g  
Ø 30 x H 34 mm

## CONDENSING SYSTEM

Air cooled  
Water cooled

## INTERNAL BIN CAPACITY

34 kg

## REFRIGERANT GAS

R404A

## OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Certifications:



**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice  
Apple store  
Google play  
Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Self Contained Ice Machine up to 74 kg

# EC 126 EASY FIT

Self Contained Ice Machine up to 74 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 74 kg

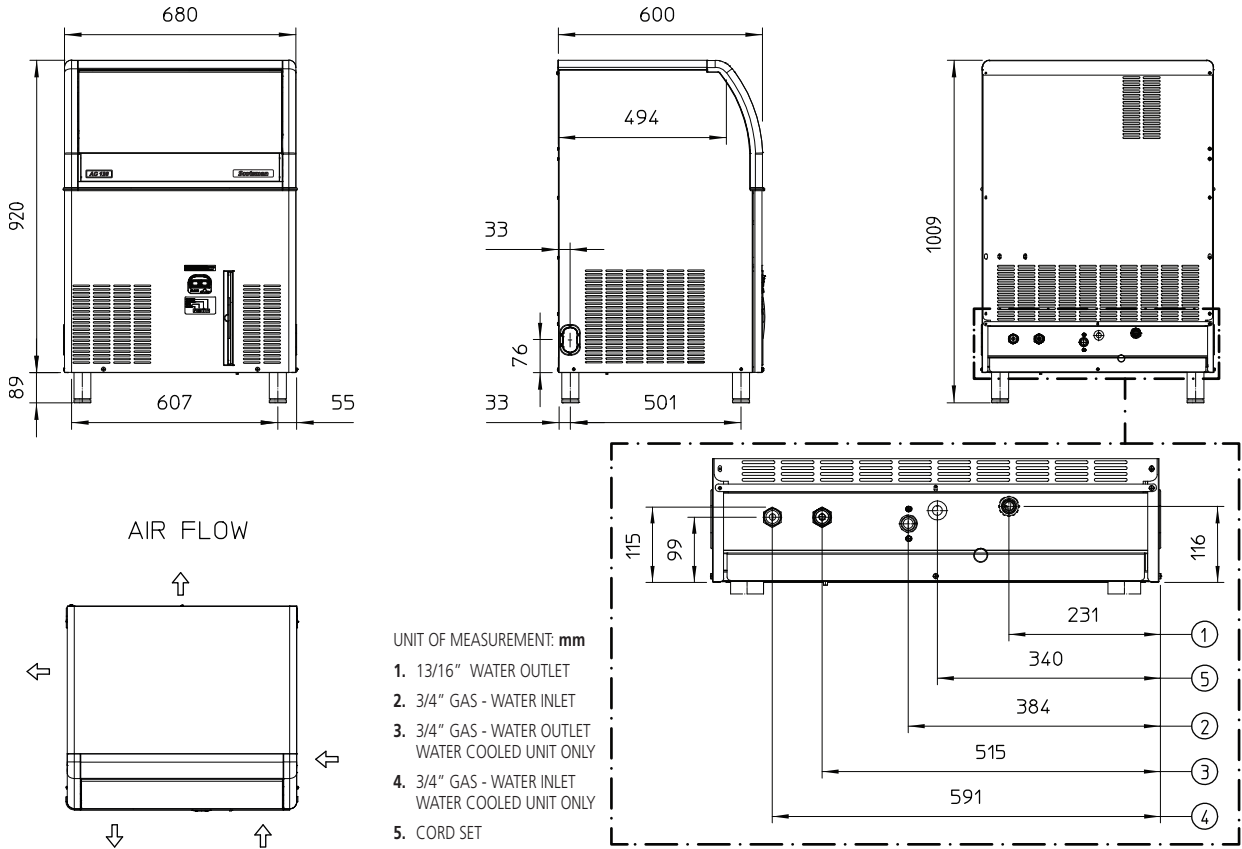

UNIT DATA			Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm <sup>2</sup>	A
Size (W x D x H)	680 x 600 x 1010 mm		EC L 126 AS	230/50/1	4913	1440	3	1.5	10
Net weight	67 kg		EC L 126 WS	230/50/1	4913	1440	3	1.5	10
SHIPPING DATA			EC M 126 AS	230/50/1	4948	1450	3	1.5	10
			EC M 126 WS	230/50/1	4948	1450	3	1.5	10
Carton (W x D x H)	750 x 670 x 1100 mm								
Weight	77 kg								
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
EC L 126 AS	Air	230/50/1	63	61	49	28.6	14.0	5.8	770
EC L 126 WS	Water	230/50/1	70	66	58	24.1	13.0	68.8	600
EC M 126 AS	Air	230/50/1	70	66	55	24.6	13.8	5.7	740
EC M 126 WS	Water	230/50/1	74	71	60	20.5	12.3	70.8	580

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions