

# EC 206 EASY FIT

**Scotsman**  
Ice Systems

Self Contained Ice Machine up to 130 kg

Item #:

Project:

Quantity:



## FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Routine Maintenance visible alarm light on front panel.
- Ergonomically designed ice-storage access, with disappearing door.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.



EC L 206  
Large Gourmet 39 g  
Ø 38 x H 41 mm



EC M 206  
Medium Gourmet 20 g  
Ø 30 x H 34 mm



EC S 206  
Small Gourmet 8 g  
Ø 21 x H 25 mm

## CONDENSING SYSTEM

Air cooled  
Water cooled

## INTERNAL BIN CAPACITY

50 kg

## REFRIGERANT GAS

R404A

## OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

## VOLTAGE V/Hz/ph

230/50/1  
230/60/1

Certifications:



## IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice  
Apple store  
Google play  
Windows store

DOWNLOAD

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Self Contained Ice Machine up to 130 kg

16 October 2017

Self Contained Ice Machine up to 130 kg

# EC 206 EASY FIT




Self Contained Ice Machine up to 130 kg

Item #:

Project:

Quantity:

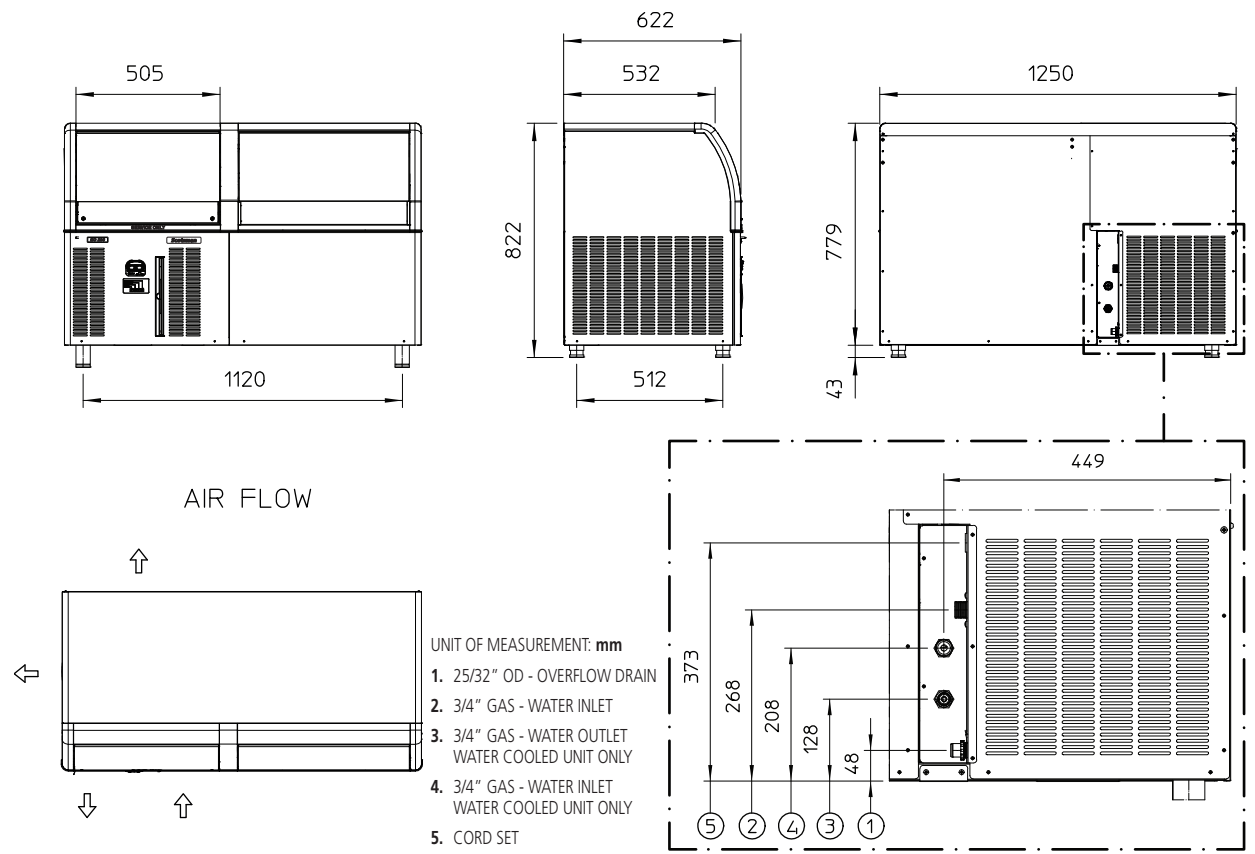

UNIT DATA  Size (W x D x H) 1250 x 620 x 860 mm  Net weight 84 kg   SHIPPING DATA  Carton (W x D x H) 1320 x 690 x 960 mm  Weight 97 kg					Compressor		Circuit wires		Max. fuse size
			Version	Voltage	Btu/h	W	No.	Ømm²	A
			EC L 206 AS	230/50/1	7165	2100	3	1.5	16
			EC M 206 AS	230/50/1	6039	1770	3	1.5	16
			EC M 206 WS	230/50/1	6039	1770	3	1.5	16
			EC S 206 AS	230/50/1	7165	2100	3	1.5	16
			EC M 206 AS	230/60/1	6995	2050	3	1.5	16
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
EC L 206 AS	Air	230/50/1	126	117	92	21.6	20.5	9.6	950
EC M 206 AS	Air	230/50/1	130	123	91	19.9	18.1	10.8	850
EC M 206 WS	Water	230/50/1	128	126	108	14.9	16.1	81.3	760
EC S 206 AS	Air	230/50/1	100	93	72	29.8	21.3	7.5	950
EC M 206 AS	Air	230/60/1	130	123	91	24.0	21.8	12.5	1050

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions