Self Contained Ice Machine up to 73 kg

Item #:
Project:
Quantity:



FEATURES

- Agion: the technology that makes products cleaner and longer lasting with built-in protection working 24/7 to resist the growth of microbes and the development of unpleasant odors.
- Clean alert: advises with a blink when it's time to clean the
- Electronic control: ambient and water temperatures may change throughout the years but your ice maker will stay the same.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Water in / ice out concept (no cycles, zero water wastage): limits to almost zero excess energy, water and time wastage.
- Ergonomic access to ice with sliding disappearing door: one-touch door lift, makes barman's life significantly easier.
- Built-in storage bin: allows most undercounter installations for easier fit-in solutions.



AF 80 Residual water content 25%

CONDENSING SYSTEM	INTERNAL BIN CAPACITY				
Air cooled Water cooled		25 kg			
REFRIGERANT GAS	OPERATING REQUIREMENTS				
R134a		Minimum	Maximum		
	Air temperature	10°C	43°C		
VOLTAGE V/Hz/ph	Water temperature	5°C	38°C		
230/50/1	Water pressure	1 bar (14 psi)	5 bar (70 psi)		
230/60/1	Electrical voltage	-10%	+10%		

Certifications:


















AF80

Scotsman° Ice Systems

Self Contained Ice Machine up to 73 kg

Item #:
Project:
Quantity:

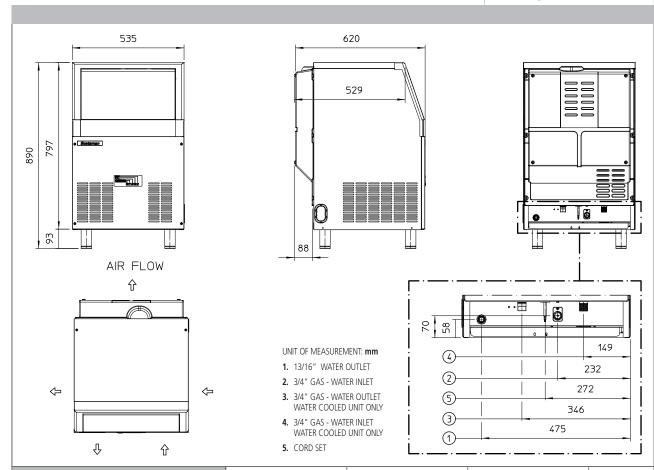

 UNIT DATA

 Size (W x D x H)
 535 x 620 x 890 mm

 Net weight
 50 kg

890 mm

			Compressor		Circuit wires	
Version	Voltage	Btu/h	w	No.	Ømm²	Α
AF 80 AS	230/50/1	2696	790	3	1.5	10
AF 80 WS	230/50/1	2661	780	3	1.5	10
AF 80 AS	230/60/1	3071	900	3	1.5	10
AF 80 WS	230/60/1	3071	900	3	1.5	10

SHIPPING DATA

Carton (W x D x H) 600 x

600 x 690 x 980 mm

Weight

58 kg

			24 h ice production kg °C Amb. / °C Water		Energy consumption*		Water usage*	Instant power	
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	w
AF 80 AS	Air	230/50/1	70	67	53	13.0	6.9	2.2	340
AF 80 WS	Water	230/50/1	73	66	56	12.5	7.0	17.1	300
AF 80 AS	Air	230/60/1	70	67	53	13.0	6.9	2.2	340
AF 80 WS	Water	230/60/1	73	66	56	12.5	7.0	17.1	300

^(*) Data refer to 32°C Amb. / 21°C Water temperature conditions