

TRUE FOOD SERVICE EQUIPMENT, INC.

2001 East Terra Lane • P.O. Box 970 • O'Fallon, Missouri 63366 (636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Name:	AIA #	
Location:		
Item #:	Qty:	SIS #
Model #:		

Model: **GDM-5**

Glass Door Merchandiser: Swing Door Counter-top Refrigerator



GDM-5

- The world's #1 manufacturer of glass door merchandisers.
- True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.
- Designed for convenient access, fast service, and attractive display.
- Oversized, factory balanced, refrigeration system holds 33°F to 38°F (.5°C to 3.3°C).
- Exterior non-peel or chip white laminated vinyl; durable and permanent.
- Interior attractive, NSF approved, white aluminum interior liner with 300 series stainless steel floor.
- Self closing door. Positive seal, torsion type closure system.
- "Low-E", double pane thermal glass door assembly with extruded aluminum frame. The latest in energy efficient technology.
- Entire cabinet structure is foamedin-place using high density, CFC free, polyurethane insulation.
- Safety shielded fluorescent interior lighting for longer, brighter, shadow-free illumination.

ROUGH-IN DATA

Specifications subject to change without notice.

Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

		Capacity (Cu. Ft.)		Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	(liters)	Shelves	L	D†	Н	HP	Voltage	Amps	Config.	(total m)	(kg)
GDM-5	1	5	2	24	23 ¹ / ₂	36 ¹ /4	1/6	115/60/1	4.3	5-15P	9	180
		142		610	597	921	1/8	230-240/50/1	1.4	A	2.74	82

[†] Depth does not include 13/8" (35 mm) for door handle.

▲ Plug type varies by country.



APPROVALS:

AVAILABLE AT:

GDM-5

Glass Door Merchandiser:

Swing Door Counter-top Refrigerator



STANDARD FEATURES

DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C).
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades gives True merchandisers a more efficient low velocity, high volume airflow design. This unique design ensures faster temperature pull down of warm product, colder holding temperatures and faster recovery in high use situations.

CABINET CONSTRUCTION

- Exterior non-peel or chip white laminated vinyl; durable and permanent.
- Interior attractive, NSF approved, white aluminum liner. 300 series stainless floor.

- Insulation entire cabinet structure is foamed-in-place using high density, CFC free, polyurethane insulation.
- Cabinet fitted with leg levelers.
- Illuminated exterior sign panel.
 Variety of sign options available.

DOOF

- "Low-E", double pane thermal glass door assembly with extruded aluminum frame. The latest in energy efficient technology.
- Self closing door. Positive seal, torsion type closure system.
- Door fitted with 15" (381 mm) extruded aluminum handle.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

SHELVING

- Two (2) adjustable, heavy duty PVC coated wire shelves 19¹¹/16"L x 18"D (501 mm x 458 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on ¹/₂" (13 mm) increments.

LIGHTING

- Safety shielded fluorescent interior lighting.
- Cabinet lighting utilizes electronic ballast and T-8 bulbs for brighter illumination, longer bulb life and increased energy efficiency.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and sign offerings.
- NSF-7 compliant for open food product.

ELECTRICAL

 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. Cord and plug set included.




OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply. ☐ 230-240V / 50 Hz.

- ☐ Black exterior.
- ☐ Stainless steel exterior.
- ☐ Red wine thermostat.
- ☐ Chocolate thermostat.
- ☐ White wine thermostat.
- ☐ Barrel locks (factory installed).
- Additional shelves.
- \square 1 $^{1}/_{4}$ " (32 mm) pricing strips.

PLAN VIEW

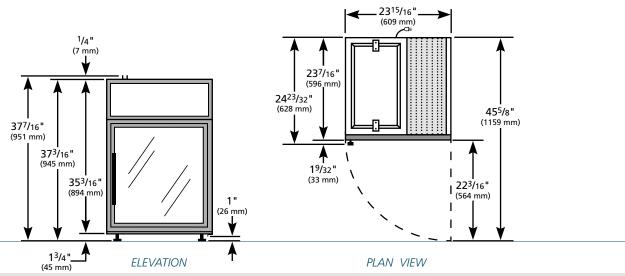

WARRANTY

One year warranty on all parts and labor and an additional 4 year warranty on compressor. (U.S.A. only)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

