



6268

SOFT SERVE FREEZER

Three Flavor, Floor, Digital Controls

Powerful & Versatile

Most compact three-flavor floor model to serve ice cream and frozen yogurt

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Low Mix Indicator

Light turns "ON" at low mix to alert operator to add mix

Self Closing Dispensing Valve

Automatically prevents product overflow after dispense

Dispense Speed Control

Provides flexibility in dispense rate control for different applications

Ideal for medium capacity outlets with limited floor space to serve more flavor varieties of ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options.



Hopper Agitators

Maintain product consistency and prevent product separation

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight



Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating
- Thermal overload to protect from motor overheating



6268

SOFT SERVE FREEZER

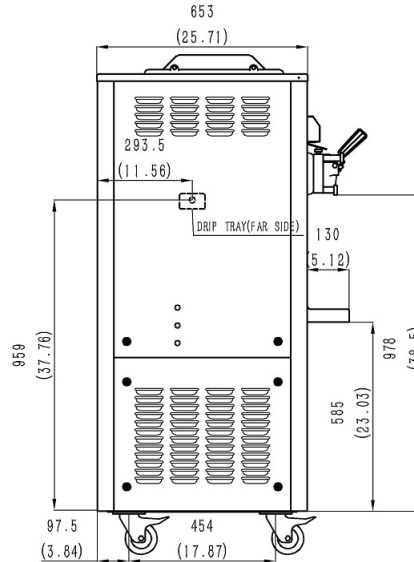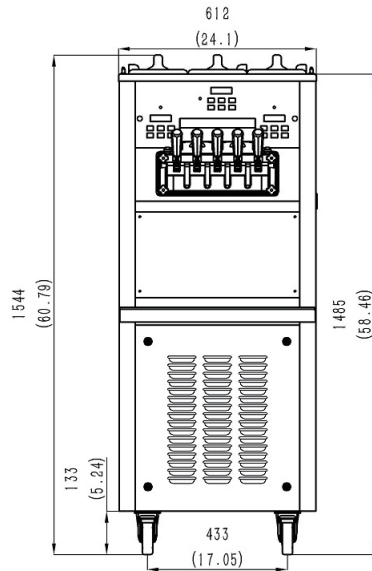

SPECIFICATIONS

Flavors	3 + 2 Twist
Freezing Cylinders	3 x 1.7L / 1.8qt
Mix Hoppers	3 x 8.0L / 8.5qt
Output Capacity (80 grams)	450 serves/hr
Clearance Requirements	152mm/6" on back

Weight Kg/lb (Gravity)

Net	250 / 556
Shipping	275 / 611
Volume	1.22 CBM / 43.08 CBF

Dimensions Net (mm/in) Shipping (mm/in)

Width	612 / 24.1	780 / 30.7
Depth	653 / 25.7	900 / 35.4
Height	1544 / 60.8	1740 / 68.5

Electrical MFS MCA Power(kW)

220-240/50/1	30	24	4.3
208-230/60/1	30	26	4.3

FEATURES

Control Systems	Three, Digital
Refrigerated Hoppers	<input checked="" type="checkbox"/>
Hopper Agitator	<input checked="" type="checkbox"/>
Temperature Display	<input checked="" type="checkbox"/>
Standby Mode	<input checked="" type="checkbox"/>
Auto CIsing Dispensing Valves	<input checked="" type="checkbox"/>
Dispensing Speed Control	<input checked="" type="checkbox"/>
Low Mix Indicator Light	<input checked="" type="checkbox"/>
Low Mix Indicator Alarm	<input checked="" type="checkbox"/>
Low Temperature Protection	<input checked="" type="checkbox"/>
Motor Amperage Protection	<input checked="" type="checkbox"/>
High Pressure Protection	<input checked="" type="checkbox"/>
Thermal Overload Protection	<input checked="" type="checkbox"/>

AVAILABLE OPTIONS

Water Cooled	<input checked="" type="checkbox"/>
Top Air Discharge Chute	<input checked="" type="checkbox"/>
Spinner	<input checked="" type="checkbox"/>
Soft Start	<input checked="" type="checkbox"/>
Custom Branding	<input checked="" type="checkbox"/>

• Above specifications are subject to change without notice