
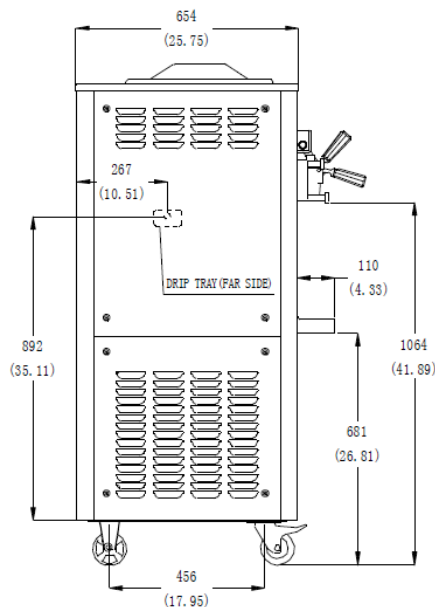
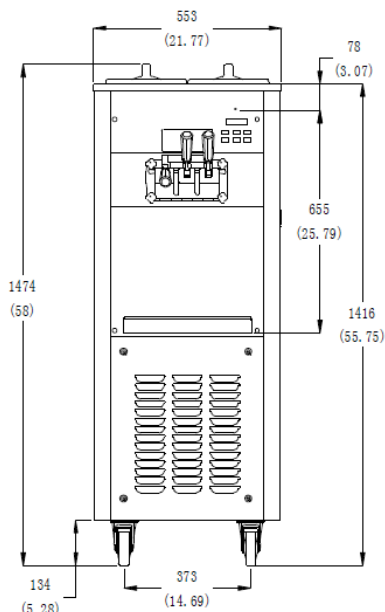


MODEL | 6350A

# soft serve Freezer

MODEL | 6350A

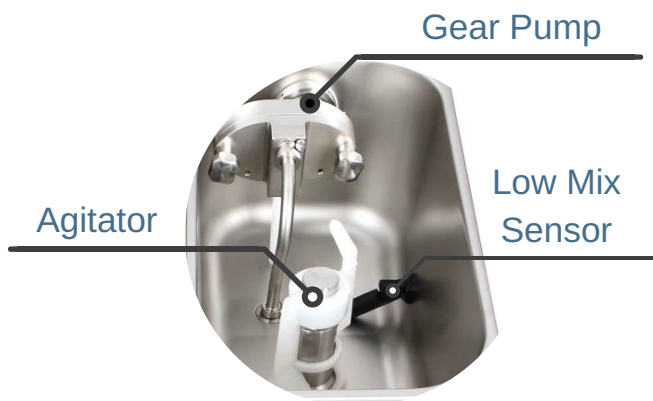

# MODEL | 6350A

## SOFT SERVE FREEZER

**Twin twist flavor, Floor, Pump  
feed,  
Microprocessor control**

### Product Offering

Offer all popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet

### Freezing Cylinder

Two, 1.7 Liter (1.8 quarts)

### Mix Hopper

Two, 10 Liters (10.6 quarts)

Separate hopper refrigeration maintains mix temperature below 4.4°C (40°F) during Cool and Standby modes.

### Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

### Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 4.4°C (40°F) during long no-use periods.

### Microprocessor Controls

Automatically regulates refrigeration and maintains consistent product quality by controlling product temperature and viscosity.

### Counter

Records number of dispenses per day and total number of dispenses.

### Temperature Display

Displays hopper and cylinder temperature; helps control product safety.

### Output

420 Cups/Hour

(80 gram/cup at 4°C Liquid & 24°C Ambient)

## Safety Protections

- Low temperature and motor overload cutouts
- protect from cylinder over freezing.
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat

## Specifications

### Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

### Motor

One, 1.0HP

### Refrigeration System

Main Compressor: One, 5500 BTU/HR, R404A

Separate Hopper Cooling Compressor:

One, 480 BTU/HR, R134A

(BTUs may vary depending on compressor used.)

### Air Cooled

Minimum clearance of 152mm (6") on both sides is required to achieve optimum performance.

The rear of the unit may be placed against a wall.

### Options

- Water Cooled.
- Local language Control systems: English, French, Spanish, German, Dutch, Czech, Chinese.
- Cone dispenser

Weight	Kg / lb
Net	182 / 404
Shipping	199 / 442

**Packaging Volume** 0.82 CBM / 29 CBF

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	553 / 21.8	650 / 25.6
Depth	654 / 25.7	780 / 30.7
Height	1474 / 58.0	1620 / 63.8

Electrical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires(W)
380-415/50/3	15	8	/5W
208-230/60/3	20	10	/4W

*This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.*

*(For exact electrical information, always refer to the data label of the unit.)*