BUNN°

Low Profile Pourover Coffee Brewer with 1 Warmer

| ITEM# | | |
|---------|--|--|
| PROJECT | | |
| | | |

DATE



Features

Low Profile Pourover Coffee Brewer

- Brews 3.8 gallons (14.8 litres) of perfect coffee per hour.
- Pourover brewer requires no plumbing completely portable.
- · All stainless steel construction.
- · Stainless steel or black finish.
- · One warmer.
- SplashGard® funnel deflects hot liquids away from the hand.
- International electrical configurations available.

Model VP17-1 SST

(decanter not included) Dimensions: 17.8" H x 8" W x 17.7" D (45.2cm H x 21.6cm W x 44.96cm D)

For current specification sheets and other information, go to www.bunn.com.

Related Products

Paper Filter Pack

Product No.: 20115.0000 Packed per case: 1,000

Dimensions: $4\frac{1}{4}$ " Base x $2\frac{3}{4}$ " Sidewall

10.8 cm Base x 6.98 cm Sidewall

WX1-warmer

Product No.: 06450.0004 One position warmer

WX2-warmer

Product No.: 06310.0004

Two position warmer



Easy Pour® black decanter

Product No.: 06100.0101 Quantity: 1 (also packaged in

quantities of 2, 3, 6, 12, & 24)



Easy Pour® orange decanter (for decaf)

Product No.: 06101.0101 Quantity: 1 (also packaged in

quantities of 2, 3, 6, 12, & 24)



| Model | Agency Listing | |
|------------|-------------------|--|
| VP17-1 SST | (UL) LISTED (NSE) | |
| VP17-1 BLK | UL) LISTED (NSE) | |

Dimensions & Specifications


| Model | Product # | Volts | Amps | Tank Heater Watts | Total Watts | Brewing Capacity | Cu. Ft. | Shipping Weight | Cord Attached |
|------------|------------|-------|------|----------------------|----------------|---------------------|------------|--------------------|------------------|
| VP17-1 SS | 13300.0001 | 120 | 13.3 | 1320 | 1600 | 3.8 gal./hr. | 4.7 | 23 lbs. | Yes* |
| VP17-1 BLK | 13300.0011 | 120 | 13.3 | 1320 | 1600 | 3.8 gal./hr. | 4.7 | 21 lbs. | Yes* |

^{*}Power cord (NEMA 5-15P) 15 Amp-120V machine only.

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: Models require 2-wires plus ground service rated 120V, single phase, 60 Hz.

Plumbing: No plumbing needed.

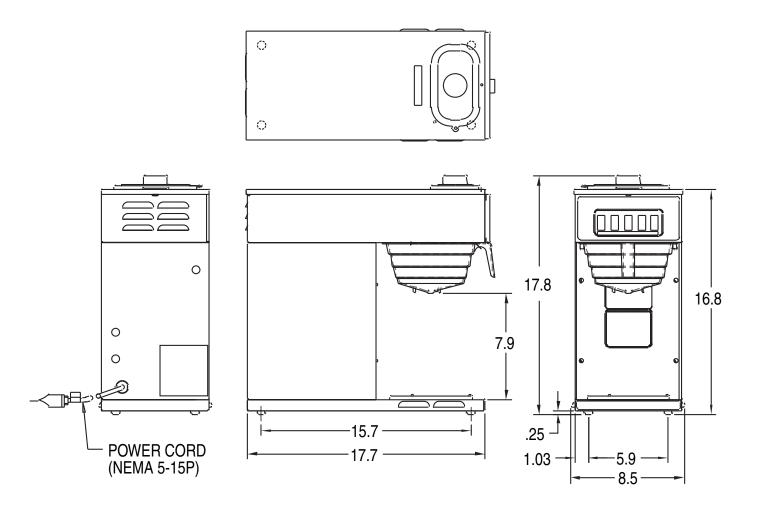

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com